

• 技术参数 (Parameters)



高效率隔爆型三相异步电动机
High Efficiency Explosion-proof Three Phase Asynchronous Motor

型号 Model	功率 Output (KW)	额定电压 Rated voltage V	额定电流 Rated Current A	额定转数 Rated Sync speed r/min	效率 Efficiency %	功率因数 Power factor cosΦ	额定转矩 Rated Torque (NM)	堵转转矩 / 额定转矩 Ts/Tn	堵转电流 / 额定电流 Is/In	最大转矩 / 额定转矩 Tmax/Tn	振动 Vibration class mm/s	噪音 Noise dB(A)	重量 Weight kg
80M1-2	0.75	380	1.7	2850	80.7	0.83	2.5	2.3	6.8	2.3	1.6	67	29
80M2-2	1.1	380	2.43	2840	82.7	0.83	3.7	2.3	7.3	2.3	1.6	67	31
90S-2	1.5	380	3.22	2850	84.2	0.84	5.0	2.3	7.6	2.3	1.6	72	36
90L-2	2.2	380	4.58	2850	85.9	0.85	7.4	2.3	7.8	2.3	1.6	72	40
100L-2	3.0	380	6.0	2870	87.1	0.87	10.0	2.3	8.1	2.3	1.6	76	50
112M-2	4.0	380/660	7.8/4.5	2890	88.1	0.88	13.2	2.3	8.3	2.3	1.6	77	67
132S1-2	5.5	380/660	10.6/6.1	2900	89.2	0.88	18.1	2.2	8.0	2.3	1.6	80	85
132S2-2	7.5	380/660	14.2/8.2	2900	90.1	0.89	24.7	2.2	7.8	2.3	1.6	80	89
160M1-2	11	380/660	20.6/11.9	2940	91.2	0.89	35.7	2.2	7.9	2.3	2.2	86	152
160M2-2	15	380/660	27.9/16.0	2940	91.9	0.89	48.7	2.2	8.0	2.3	2.2	86	164
160L-2	18.5	380/660	34.2/19.7	2940	92.4	0.89	60.1	2.2	8.1	2.3	2.2	86	177
180M-2	22	380/660	40.5/23.3	2950	92.7	0.89	71.2	2.2	8.2	2.3	2.2	88	240
200L1-2	30	380/660	54.9/31.6	2950	93.3	0.89	97.1	2.2	7.5	2.3	2.2	90	289
200L2-2	37	380/660	37.4/38.8	2950	93.7	0.89	119.8	2.2	7.5	2.3	2.2	90	307
225M-2	45	380/660	81.7/47.1	2960	94.0	0.89	145.2	2.2	7.6	2.3	2.2	92	378
250M-2	55	380/660	99.6/57.3	2970	94.3	0.89	176.9	2.2	7.6	2.3	2.2	92	529
280S-2	75	380/660	135.2/77.8	2970	94.7	0.89	241.2	2.0	6.9	2.3	2.2	94	645
280M-2	90	380/660	161.7/93.1	2970	95.	0.89	289.4	2.0	7.0	2.3	2.2	94	701
315S-2	110	380/660	197.3/113.6	2984	95.2	0.89	352.0	1.9	7.1	2.2	2.8	96	1075
315M-2	132	380/660	236/136	2984	95.4	0.89	422.5	1.9	7.1	2.2	2.8	96	1182
315L1-2	160	380/660	285.7/164.5	2984	95.6	0.89	512.1	1.9	7.1	2.2	2.8	98	1303
315L2-2	200	380/660	356.4/205.2	2984	95.8	0.89	640.1	1.9	7.1	2.2	2.8	98	1525
355S1-2	185	380/660	329.7/189.8	2980	95.8	0.89	592.9	1.9	7.1	2.2	2.8	98	1680
355S2-2	200	380/660	356.4/205.2	2980	95.8	0.89	640.9	1.9	7.1	2.2	2.8	98	1740
355M1-2	220	380/660	392.0/225.7	2980	95.8	0.89	705.0	1.8	7.1	2.2	2.8	100	1790
355M2-2	250	380/660	440.6/253.7	2980	95.8	0.90	801.2	1.8	7.1	2.2	2.8	100	1840
355L1-2	280	380/660	493.4/284.1	2980	95.8	0.90	897.3	1.8	7.1	2.2	2.8	100	2040
355L2-2	315	380/660	555.1/319.6	2980	95.8	0.90	1009.5	1.8	7.1	2.2	2.8	100	2060

YBX3系列高效率隔爆型三相异步电动机是YB3系列的更新换代产品，电机效率符合GB18613-2020《中小型三相异步电动机能效限定值及能效等级》中的3级能效 (IE3)。本系列电动机具有高效节能、温升裕度大、体积小、重量轻、外形美观、运行可靠、性能好、噪声低、振动小、使用维护方便的优点。适用于石油、煤矿井下 (非采掘工作面) 及工厂 II A、II B、II C级，温度组分别为T1~T4的爆炸性气体环境的危险场所。

YBX3 series high-efficiency flameproof three-phase asynchronous motor is the replacement of YB3 series, motor efficiency in line with GB18613-2020 "Small and medium-sized three-phase asynchronous motor energy efficiency limits and energy efficiency grades" in the level 3 energy efficiency (IE3).

This series of motor has the advantages of high efficiency and energy saving, large temperature rise margin, small size, light weight, beautiful appearance, reliable operation, good performance, low noise, small vibration, convenient use and maintenance. It is suitable used for oil, coal mine underground (non-mining face) and factory II A, II B, II C grade, temperature groups are T1 ~ T4 explosive gas environment dangerous places.


• 技术参数 (Parameters)

型号 Model	功率 Output (KW)	额定电压 Rated voltage V	额定电流 Rated Current A	额定转数 Rated Sync speed r/min	效率 Efficiency %	功率因数 Power factor cosφ	额定转矩 Rated Torque (NM)	堵转转矩 / 额定转矩 Ts/Tn	堵转电流 / 额定电流 Is/In	最大转矩 / 额定转矩 Tmax/Tn	振动 Vibtation class mm/s	噪音 Noise dB(A)	重量 Weight kg
80M1-4	0.55	380	1.43	1390	77.8	0.75	3.8	2.3	6.3	2.3	1.6	58	29
80M2-4	0.75	380	1.84	1390	82.5	0.75	5.2	2.3	6.5	2.3	1.6	58	30
90S-4	1.1	380	2.65	1390	84.1	0.75	7.6	2.3	6.6	2.3	1.6	61	37
90L-4	1.5	380	3.56	1390	85.3	0.75	10.3	2.3	6.9	2.3	1.6	61	40
100L1-4	2.2	380	4.8	1420	86.7	0.81	14.8	2.3	7.5	2.3	1.6	64	51
100L2-4	3.0	380	6.3	1420	87.7	0.82	20.2	2.3	7.6	2.3	1.6	64	56
112M-4	4.0	380/660	8.4/4.8	1430	88.6	0.82	26.7	2.3	7.7	2.3	1.6	65	72
132S-4	5.5	380/660	11.4/6.5	1450	89.6	0.82	36.2	2.0	7.5	2.3	1.6	71	90
132M-4	7.5	380/660	15.2/8.7	1450	90.4	0.83	49.4	2.0	7.4	2.3	1.6	71	102
160M-4	11	380/660	21.5/12.4	1460	91.4	0.85	72.0	2.0	7.5	2.3	2.2	75	148
160L-4	15	380/660	29.1/16.8	1460	92.1	0.85	98.1	2.0	7.5	2.3	2.2	75	168
180M-4	18.5	380/660	35.3/20.3	1470	92.6	0.86	120.2	2.0	7.7	2.3	2.2	76	221
180L-4	22	380/660	41.8/24.1	1470	93.0	0.86	142.9	2.0	7.8	2.3	2.2	76	296
200L-4	30	380/660	56.0/32.2	1470	93.6	0.87	194.9	2.0	7.2	2.3	2.2	79	379
225S-4	37	380/660	68.8/39.6	1480	93.9	0.87	238.8	2.0	7.3	2.3	2.2	81	409
225M-4	45	380/660	83.4/48.0	1480	94.2	0.87	290.4	2.0	7.4	2.3	2.2	81	507
250M-4	55	380/660	100.4/57.8	1480	94.6	0.88	354.9	2.0	7.4	2.3	2.2	83	699
280S-4	75	380/660	136.3/78.5	1480	95.0	0.88	484.0	2.0	6.7	2.3	2.2	86	724
280M-4	90	380/660	161.4/92.9	1480	95.2	0.88	580.7	2.0	7.0	2.3	2.2	86	756
315S-4	110	380/660	196.8/113.3	1484	95.4	0.89	707.9	2.0	7.0	2.2	2.8	93	1098
315M-4	132	380/660	235.7/135.7	1484	95.6	0.89	849.5	2.0	7.0	2.2	2.8	93	1150
315L1-4	160	380/660	285.1/164.2	1484	95.8	0.89	1029.7	2.0	7.0	2.2	2.8	94	1274
315L2-4	200	380/660	355.7/204.8	1484	96.0	0.89	1287.1	2.0	7.0	2.2	2.8	94	1566
355S1-4	185	380/660	329.0/189.4	1488	96.0	0.89	1187.3	2.0	7.0	2.2	2.8	94	1867
355S2-4	200	380/660	355.7/204.8	1488	96.0	0.89	1283.6	2.0	7.0	2.2	2.8	94	1917
355M1-4	220	380/660	391.2/225.3	1488	96.0	0.89	1412.0	2.0	7.0	2.2	2.8	95	1941
355M2-4	250	380/660	444.6/256.0	1488	96.0	0.89	1604.5	2.0	7.0	2.2	2.8	95	2006
355L1-4	280	380/660	497.9/286.7	1488	96.0	0.89	1797.0	2.0	7.0	2.2	2.8	95	2173
355L2-4	315	380/660	560.2/322.5	1488	96.0	0.89	2021.7	2.0	7.0	2.2	2.8	95	2203
YBX3系列高效率隔爆型三相异步电动机 (6极) 50Hz YBX3 series high efficiency flameproof three-phase asynchronous motor (6pole) 50HZ													
80M1-6	0.37	380	1.30	890	62.0	0.70	4.0	1.9	4.7	2.0	1.6	54	28
80M2-6	0.55	380	1.58	890	73.6	0.72	5.9	1.9	4.7	2.1	1.6	54	30
90S-6	0.75	380	2.01	910	78.9	0.72	7.9	2.1	5.8	2.1	1.6	57	35
90L-6	1.1	380	2.86	910	81.0	0.73	11.5	2.1	5.9	2.1	1.6	57	40
100L-6	1.5	380	3.7	930	82.5	0.74	15.4	2.1	6.0	2.1	1.6	61	48
112M-6	2.2	380	5.40	940	84.3	0.74	22.4	2.1	6.0	2.1	1.6	65	62
132S-6	3.0	380	7.2	970	85.6	0.74	29.5	2.0	6.2	2.1	1.6	69	87
132M1-6	4.0	380/660	9.5/5.4	970	86.8	0.74	39.4	2.0	6.8	2.1	1.6	69	95
132M2-6	5.5	380/660	12.7/7.3	970	88.0	0.75	54.1	2.1	7.1	2.1	1.6	69	103
160M-6	7.5	380/660	16.4/9.4	970	89.1	0.78	73.8	2.1	6.7	2.1	2.2	73	147
160L-6	11	380/660	23.7/13.7	970	90.3	0.81	108.3	2.1	6.9	2.1	2.2	73	175
180L-6	15	380/660	30.9/17.8	980	91.2	0.81	146.2	2.0	7.2	2.1	2.2	73	230
200L1-6	18.5	380/660	37.8/21.8	980	91.7	0.82	180.3	2.1	7.2	2.1	2.2	76	281
200L2-6	22	380/660	44.2/24.5	980	92.2	0.81	214.4	2.1	7.3	2.1	2.2	76	284
225M-6	30	380/660	60.6/34.9	980	92.9	0.84	292.3	2.0	7.1	2.1	2.2	76	360
250M-6	37	380/660	72.2/41.3	980	93.3	0.86	360.6	2.1	7.1	2.1	2.2	78	482
280S-6	45	380/660	84.8/48.9	990	93.7	0.86	434.1	2.1	7.2	2.0	2.2	80	589
280M-6	55	380/660	103.3/59.5	990	94.1	0.85	530.6	2.1	7.2	2.0	2.2	80	655
315S-6	75	380/660	141.7/81.6	987	94.6	0.84	725.7	2.0	7.0	2.0	2.8	85	1074
315M-6	90	380/660	171.5/98.8	987	94.9	0.85	870.8	2.0	7.0	2.0	2.8	85	1170
315L1-6	110	380/660	206.8/119	987	95.1	0.86	1064.3	2.0	7.0	2.0	2.8	85	1295
315L2-6	132	380/660	244.5/140.7	987	95.4	0.87	1277.2	2.0	7.0	2.0	2.8	85	1450
355S-6	160	380/660	292.3/168.3	985	95.6	0.87	1551.3	1.9	7.0	2.0	2.8	92	1861
355M1-6	185	380/660	337.3/194.2	985	95.8	0.87	1793.7	1.9	7.0	2.0	2.8	92	1880
355M2-6	200	380/660	364.6/209.9	985	95.8	0.87	1939.1	1.9	7.0	2.0	2.8	92	1889
355L1-6	220	380/660	401.1/230.9	985	95.8	0.87	2133.0	1.9	7.0	2.0	2.8	92	2142
355L2-6	250	380/660	455.7/262.4	985	95.8	0.87	2423.9	1.9	7.0	2.0	2.8	92	2171

• 技术参数 (Parameters)


型号 Model	功率 Output (KW)	额定电压 Rated voltage V	额定电流 Rated Current A	额定转数 Rated Sync speed r/min	效率 Efficiency %	功率因数 Power factor cosΦ	额定转矩 Rated Torque (NM)	堵转转矩 / 额定转矩 Ts/Tn	堵转电流 / 额定电流 Is/In	最大转矩 / 额定转矩 Tmax/Tn	振动 Vibration class mm/s	噪音 Noise dB(A)	重量 Weight kg
80M1-8	0.18	380	0.88	650	51.0	0.61	2.6	1.8	3.3	1.9	1.6	52	27
80M2-8	0.25	380	1.15	650	54.0	0.61	3.7	1.8	3.3	1.9	1.6	52	28
90S-8	0.37	380	1.49	670	62.0	0.61	5.3	1.8	4.0	1.9	1.6	56	34
90L-8	0.55	380	2.17	670	63.0	0.61	7.8	1.8	4.0	2.0	1.6	56	39
100L1-8	0.75	380	2.5	690	68.7	0.67	10.4	1.8	4.0	2.0	1.6	59	46
100L2-8	1.1	380	3.5	690	70.7	0.67	15.2	1.8	5.0	2.0	1.6	59	48
112M-8	1.5	380	4.4	690	72.8	0.71	20.8	1.8	5.0	2.0	1.6	61	62
132S-8	2.2	380	6.0	710	77.9	0.71	29.6	1.8	6.0	2.0	1.6	64	87
132M-8	3.0	380	7.9	710	78.9	0.93	40.4	1.8	6.0	2.0	1.6	64	95
160M1-8	4.0	380/660	10.4/6.0	720	79.9	0.93	53.1	1.9	6.0	2.0	2.2	68	138
160M2-8	5.5	380/660	13.8/7.9	720	82.0	0.74	73.0	1.9	6.0	2.0	2.2	68	145
160L-8	7.5	380/660	18.1/10.4	720	84.0	0.75	99.5	1.9	6.0	2.0	2.2	68	172
180L-8	11	380/660	25.8/14.8	720	86.4	0.75	146.0	2.0	6.5	2.0	2.2	70	226
200L-8	15	380/660	34.5/19.9	730	86.9	0.76	196.2	2.0	6.6	2.0	2.2	73	275
225S-8	18.5	380/660	41.5/23.9	740	89.1	0.76	238.8	1.9	6.6	2.0	2.2	73	336
225M-8	22	380/660	47.8/27.5	740	90.05	0.78	283.9	1.9	6.6	2.0	2.2	73	348
250M-8	30	380/660	63.8/37	740	90.4	0.79	387.2	1.9	6.5	2.0	2.2	75	475
280S-8	37	380/660	78.3/45.1	740	90.9	0.79	477.5	1.9	6.6	2.0	2.2	76	576
280M-8	45	380/660	94.7/54.5	740	91.4	0.79	580.7	1.9	6.6	2.0	2.2	76	635
315S-8	55	380/660	113.2/65.2	740	92.3	0.80	709.8	1.8	6.6	2.0	2.8	82	1048
315M-8	75	380/660	152.8/88	740	93.2	0.80	967.9	1.8	6.4	2.0	2.8	82	1120
315L1-8	90	380/660	182.8/105.3	740	93.5	0.80	1161.5	1.8	6.4	2.0	2.8	82	1260
315L2-8	110	380/660	218/125.5	740	93.5	0.82	1419.6	1.8	6.4	2.0	2.8	82	1380
355S-8	132	380/660	260.8/150.1	740	93.8	0.82	1703.5	1.8	6.4	2.0	2.8	90	1780
355M-8	160	380/660	315.4/181.6	740	94.0	0.82	2061.9	1.8	6.4	2.0	2.8	90	1820
355L1-8	185	380/660	364.7/210.0	740	94.0	0.82	2387.5	1.8	6.4	2.0	2.8	90	1830
355L2-8	200	380/660	388.7/223.8	740	94.2	0.83	2581.1	1.8	6.4	2.0	2.8	90	2050
YBX3系列高效率隔爆型三相异步电动机 (10极) 50Hz YBX3 series high efficiency flameproof three-phase asynchronous motor (10pole) 50HZ													
315S-10	45	380/660	200/57.6	592	91.2	0.75	725.9	1.3	6.2	2.0	2.8	82	985
315M-10	55	380/660	121.4/69.9	592	91.8	0.75	887.2	1.3	6.2	2.0	2.8	82	1025
315L1-10	75	380/660	162.4/93.5	592	92.3	0.76	1209.9	1.3	6.2	2.0	2.8	82	1165
315L2-10	90	380/660	191.2/110.1	592	92.9	0.77	1451.9	1.3	6.2	2.0	2.8	82	1289
355S-10	90	380/660	191.2/110.1	585	92.9	0.77	1469.2	1.3	6.2	2.0	2.8	82	1695
355M1-10	110	380/660	230.2/132.5	585	93.1	0.78	1795.7	1.3	6.0	2.0	2.8	90	1785
355M2-10	132	380/660	275.0/158.3	585	93.5	0.78	2154.9	1.3	6.0	2.0	2.8	90	1850
355L1-10	160	380/660	333.3/191.9	585	93.5	0.78	2612.0	1.3	6.0	2.0	2.8	90	1948
355L2-10	185	380/660	385.4/221.9	585	93.5	0.78	3020.1	1.3	6.0	2.0	2.8	90	1970

• YBX3-YFB3-YBD3系列电动机外形及安装尺寸 B3
(YBX3-YFB3-YBD3 series motor mounting and overall dimensions)

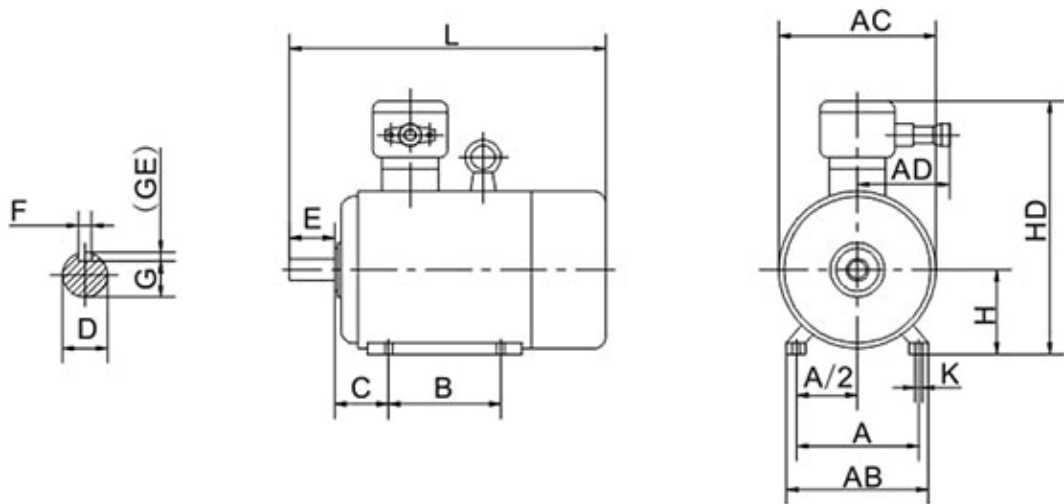


机座号 Stand No.	极数 Poles	安装尺寸 Mounting Dimension										外形尺寸 Overall Dimension														
		A	A/2	B	C	D	E	F	G	H	K	AB	AC	AD	HD	L										
80M	2、4、6、8	125	62.5	100	50	19	40	6	15.5	80	10	165	165	165	320	330										
90S		140	70	100	56	24	50	8	20	90		180	180	180	350	380										
90L				125								200	205	180	400	410										
100L		160	80	140	63	28	60		24	100		245	230	200	425	473										
112M		190	95	140	70						12	280	270	200	450	520										
132S		216	108	140	89	38	80	10	33	132		330	325	220	520	570										
132M				178												615										
160M		254	127	210	108	42	110		12	37	160	355	360	220	550	806										
160L				254													795									
180M		279	139.5	241	121	48		14	42.5	180	390	400	250	645	865											
180L				279																						
200L	318	159	305	133	55	16	49	200	19	435	450	250	690	913												
225S	4、8	356	178	286	149					60	140	18	53	49	490	500	300	730	995							
225M				2		311	55	110		16	49															
250M	2、6、8	406	203	349	168	60	140	18	53	250	24	545	560	300	810	1047										
	2																75	20	67.5							
280S	4、6、8	457	228.5	368	190	75		18	58	280		28	640	630	400	1020				1185						
280M	2					419		65	18		58															
	4、6、8						75										20	67.5								
315S	2	508	254	406	216	65	140	18	58	315	28	640	630	400	1020	1260										
	4、6、8、10					80	170	22	71																	
315M	2			457		65	140	18	58								80	170	22	71	315	28	740	750	500	1080
	4、6、8、10																									
315L	2	508	254	508	216	65	140	18	58	315	28	740	750	500	1080	1305										
	4、6、8、10					80	170	22	71																	
355S	2	610	305	500	254	75	140	20	67.5	355	28	740	750	500	1080	1415										
	4、6、8、10					95	170	25	86																	
355M	2			560		630	254	75	140								20	67.5	355	28	740	750	500	1080	1485	
	4、6、8、10							95	170								25	86								
355L	2	610	305	630	254	75	140	20	67.5	355	28	740	750	500	1080	1535										
	4、6、8、10					95	170	25	86																	

• YBX3-YFB3-YBD3系列电动机外形及安装尺寸 B5
(YBX3-YFB3-YBD3 series motor mounting and overall dimensions)

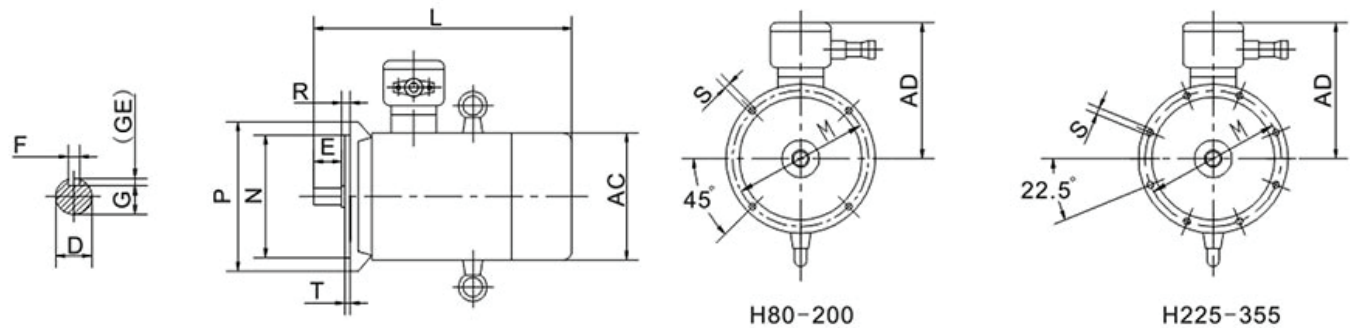

机座号 Stand No.	极数 Poles	安装尺寸 Mounting Dimension											外形尺寸 Overall Dimension														
		D	E	F	G	M	N	P	R	S	T	凸缘孔数 FLANGE HOLES	AC	AD	L												
80M	4、6、8、10	19	40	6	15.5	165	130	200	0	12	35	4	165	240	330												
90S		24	50	8	20								215	180	250	15	4	180	260	380							
90L																		28	60	24	265	230	300	380	280	806	
100L		38	80		10	33	300	250																			350
112M																		42	110	12							
132S		48	14	42.5	350	300	400	510		370	995																
132M													55	16	49	350	300	400		580							410
160M		60	18	53	400	350	450	580		410	1122																
160L													65	18	58	400	350	450		580	410	1122					
180M		75	20	67.5	400	350	450	580		410	1122																
180L													80	22	71	400	350	450	580	410	1122						
200L	85	24	75	400	350	450	580	410	1122																		
225S										90	26	79	400	350	450	580	410	1122									
225M	95	28	83	400	350	450	580	410	1122																		
250M										100	30	87	400	350	450	580	410	1122									
280S	105	32	91	400	350	450	580	410	1122																		
280M										110	34	95	400	350	450	580	410	1122									
315S	115	36	99	400	350	450	580	410	1122																		
315M										120	38	103	400	350	450	580	410	1122									
315L	125	40	107	400	350	450	580	410	1122																		
355S										130	42	111	400	350	450	580	410	1122									
355M	135	44	115	400	350	450	580	410	1122																		
355L										140	46	119	400	350	450	580	410	1122									
355S	145	48	123	400	350	450	580	410	1122																		
355M										150	50	127	400	350	450	580	410	1122									
355L	155	52	131	400	350	450	580	410	1122																		
355S										160	54	135	400	350	450	580	410	1122									
355M	165	56	139	400	350	450	580	410	1122																		
355L										170	58	143	400	350	450	580	410	1122									
355S	175	60	147	400	350	450	580	410	1122																		
355M										180	62	151	400	350	450	580	410	1122									
355L	185	64	155	400	350	450	580	410	1122																		
355S										190	66	159	400	350	450	580	410	1122									
355M	195	68	163	400	350	450	580	410	1122																		
355L										200	70	167	400	350	450	580	410	1122									
355S	205	72	171	400	350	450	580	410	1122																		
355M										210	74	175	400	350	450	580	410	1122									
355L	215	76	179	400	350	450	580	410	1122																		
355S										220	78	183	400	350	450	580	410	1122									
355M	225	80	187	400	350	450	580	410	1122																		
355L										230	82	191	400	350	450	580	410	1122									
355S	235	84	195	400	350	450	580	410	1122																		
355M										240	86	199	400	350	450	580	410	1122									
355L	245	88	203	400	350	450	580	410	1122																		
355S										250	90	207	400	350	450	580	410	1122									
355M	255	92	211	400	350	450	580	410	1122																		
355L										260	94	215	400	350	450	580	410	1122									
355S	265	96	219	400	350	450	580	410	1122																		
355M										270	98	223	400	350	450	580	410	1122									
355L	275	100	227	400	350	450	580	410	1122																		
355S										280	102	231	400	350	450	580	410	1122									
355M	285	104	235	400	350	450	580	410	1122																		
355L										290	106	239	400	350	450	580	410	1122									
355S	295	108	243	400	350	450	580	410	1122																		
355M										300	110	247	400	350	450	580	410	1122									
355L	305	112	251	400	350	450	580	410	1122																		
355S										310	114	255	400	350	450	580	410	1122									
355M	315	116	259	400	350	450	580	410	1122																		
355L										320	118	263	400	350	450	580	410	1122									
355S	325	120	267	400	350	450	580	410	1122																		
355M										330	122	271	400	350	450	580	410	1122									
355L	335	124	275	400	350	450	580	410	1122																		
355S										340	126	279	400	350	450	580	410	1122									
355M	345	128	283	400	350	450	580	410	1122																		
355L										350	130	287	400	350	450	580	410	1122									
355S	355	132	291	400	350	450	580	410	1122																		
355M										360	134	295	400	350	450	580	410	1122									
355L	365	136	299	400	350	450	580	410	1122																		
355S										370	138	303	400	350	450	580	410	1122									
355M	375	140	307	400	350	450	580	410	1122																		
355L										380	142	311	400	350	450	580	410	1122									
355S	385	144	315	400	350	450	580	410	1122																		
355M										390	146	319	400	350	450	580	410	1122									
355L	395	148	323	400	350	450	580	410	1122																		
355S										400	150	327	400	350	450	580	410	1122									
355M	405	152	331	400	350	450	580	410	1122																		
355L										410	154	335	400	350	450	580	410	1122									
355S	415	156	339	400	350	450	580	410	1122																		
355M										420	158	343	400	350	450	580	410	1122									
355L	425	160	347	400	350	450	580	410	1122																		
355S										430	162	351	400	350	450	580	410	1122									
355M	435	164	355	400	350	450	580	410	1122																		
355L										440	166	359	400	350	450	580	410	1122									
355S	445	168	363	400	350	450	580	410	1122																		
355M										450	170	367	400	350	450	580	410	1122									
355L	455	172	371	400	350	450	580	410	1122																		
355S										460	174	375	400	350	450	580	410	1122									
355M	465	176	379	400	350	450	580	410	1122																		
355L										470	178	383	400	350	450	580	410	1122									
355S	475	180	387	400	350	450	580	410	1122																		
355M										480	182	391	400	350	450	580	410	1122									
355L	485	184	395	400	350	450	580	410	1122																		
355S										490	186	399	400	350	450	580	410	1122									
355M	495	188	403	400	350	450	580	410	1122																		
355L										500	190	407	400	350	450	580	410	1122									
355S	505	192	411	400	350	450	580	410	1122																		
355M										510	194	415	400	350	450	580	410	1122									
355L	515	196	419	400	350	450	580	410	1122																		
355S										520	198	423	400	350	450	580	410	1122									
355M	525	200	427	400	350	450	580	410	1122																		
355L										530	202	431	400	350	450	580	410	1122									
355S	535	204	435	400	350	450	580	410	1122																		
355M										540	206	439	400	350	450	580	410	1122									
355L	545	208	443	400	350	450	580	410	1122																		
355S										550	210	447	400	350	450	580	410	1122									
355M	555	212	451	400	350	450	580	410	1122																		
355L										560	214	455	400	350	450	580	410	1122									
355S	565	216	459	400	350	450	580	410	1122																		
355M										570	218																

YBX3-YFB3-YBD3系列电动机外形及安装尺寸 B35
(YBX3-YFB3-YBD3 series motor mounting and overall dimensions)

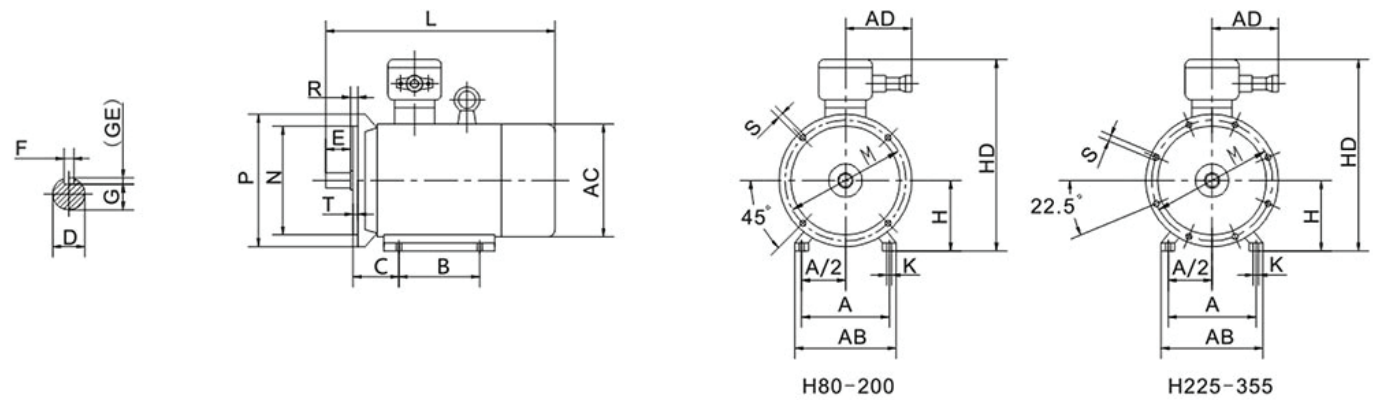

机座号 Stand No.	极数 Poles	安装尺寸 Mounting Dimension																外形尺寸 Overall Dimension																		
		A	A/2	B	C	D	E	F	G	H	K	M	N	P	R	S	T		AB	AC	AD	HD	L													
80M	4、6、8、10	125	62.5	100	50	19	40	6	15.5										165	165	165	320	330													
90S		140	70	100	56	24	50	8	20	90	10	165	130	200		12	3.5		180	180	180	350	380													
90L				125																			410													
100L		160	80	140	63	28	60		24	100	12	215	180	250		14.5	4	4	200	205	180	400	473													
112M		190	95	140	70																112										245	230	200	420	520	
132S		216	108	140	89	38	80	10	33	132		265	230	300					280	270	200	450	570													
132M				178																		615														
160M		254	127	210	108	42	110	12	37	160	15					0			330	325	220	520	755													
160L				254																						795										
180M		279	139.5	241	121	48		14	42.5	180		300	250	350									355	360	220	550	806									
180L				279																																
200L	318	159	305	133	55		16	49	200		350	300	400					390	400	250	645	865														
225S	4、8			286	149	60	140	18	53	19						18.5	5	8					913													
225M	2	356	178	311		55	110	16	49		225	400	350	450									435	450	250	690	923									
250M	4、6、8					60	140		53	250																	953									
	2	406	203	349		168			18			58													490	500	300	730	995							
280S	4、6、8	457	228.5	368	190	75			20	67.5	280	24	500	450	450									1047												
280M	2			419		65		18	58																						545	560	300	810		
	4、6、8					75	20	67.5																									1122			
315S	4、6、8、10	508	254	406		216	65	140	18	58										315		600	550	660									1185			
315M	2				80		170	22	71																								1260			
	4、6、8、10				80		170	22	71																					640	630	400	1020	1305		
315L	4、6、8、10			508			508		65	140	18	58																						1380		
355S	4、6、8、10	610	305	500	254	75	140	20	67.5	355		740	680	800		0	24	6	8					1415												
	2					95	170	25	86																						1485					
355M	4、6、8、10					560		75	140											20	67.5											740	750	500	1080	1535
	2							75	140											20	67.5														1605	
355L	4、6、8、10			630		95	170	25	86														1645													
																							1675													

Changzhou Yongzhuan Motor Co., LTD

Wechat /Cell / WhatsApp: +86-15861132046

E-Mail: rylee@vmttech.com

Add: No.70 Chenyang, Jiaze Wujin Changzhou City, Jiangsu Province, China

Zip Code: 213153

Website: <https://www.victory-motor.com/>