

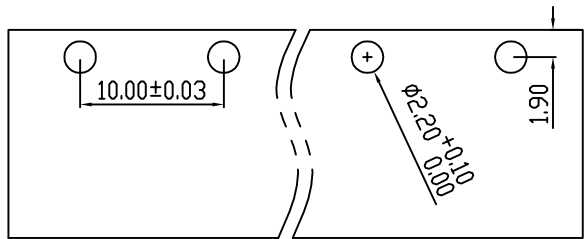
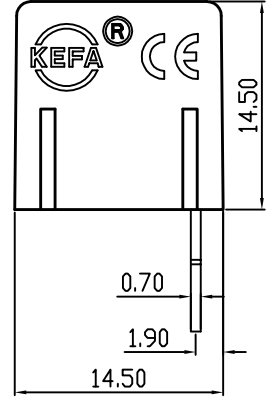



linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to 6	to 10	to 30	to 60	to 100	to 160		to 10	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

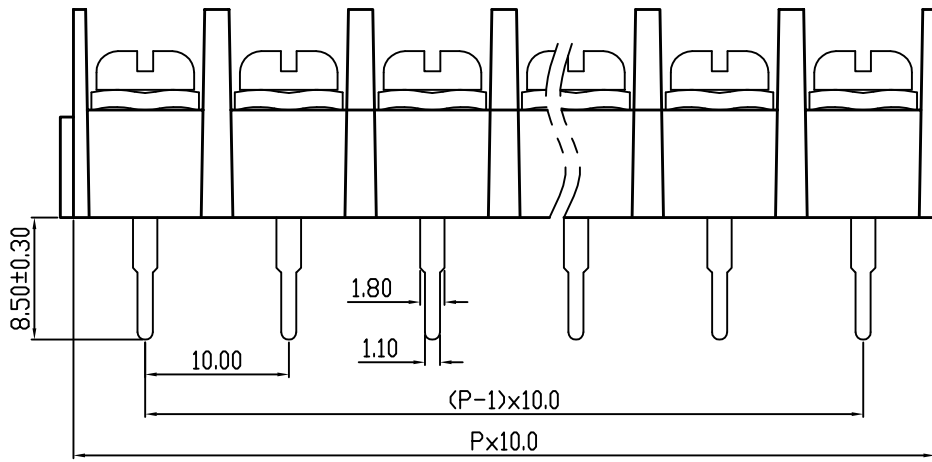

PCB LAYOUT

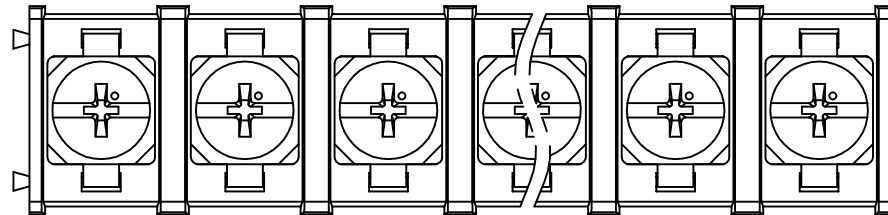

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	300	-	-	
额定电流	Rated Current [A]	25	-	-	
接线范围	Wire Range				22-12
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数 IEC Technical Data					
额定电压	Rated Voltage [V]				750
额定电流	Rated Current [A]				24
耐电压	Withstanding Voltage				3000V/1Min
导线截面积	Conductor cross section				2.5
硬质/柔性导线	Solid/flexible [mm ²]				
材料 Material					
绝缘材料	Insulation Material				PA66
阻燃等级	Inflammability				UL94V-0
导体材料	Contacting Material				铜合金 Copper alloy
导体表面镀层	Contactive Coating				镀仿金 Gold plating
一般参数 Other Data					
间距	Pitch [mm]				10.0
极数	Poles [P]				2-24
剥线长度	Stripping Length [mm]				-
螺丝	Screw/扭矩 Torque(Max) [N.m]				M4/1.0
工作温度	Operating temperatur [°C]				-40~+105
引针尺寸	Pin Dimensions [mm]				8.5
PCB板孔径	PCB Hole Diameter [mm]				2.2

DES.	LQQ	DATE	21.12.15	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A	
CHK.	BY	DATE	21.12.15	慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD								名称/TITLE	KF1000-10.0
APP.	CLF	DATE	21.12.15										