
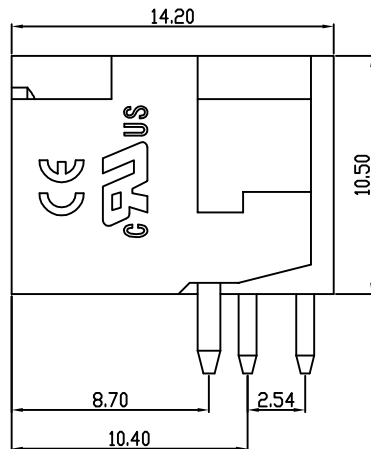
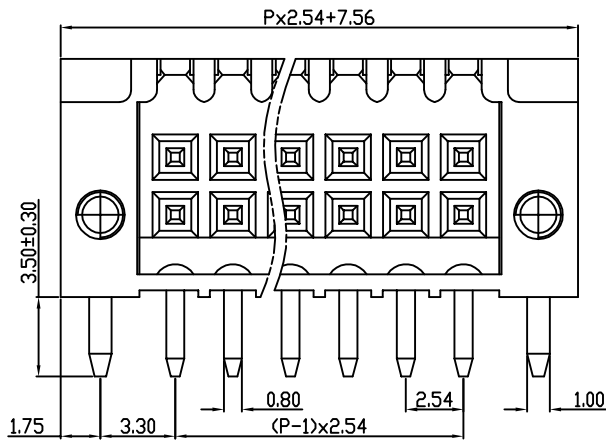

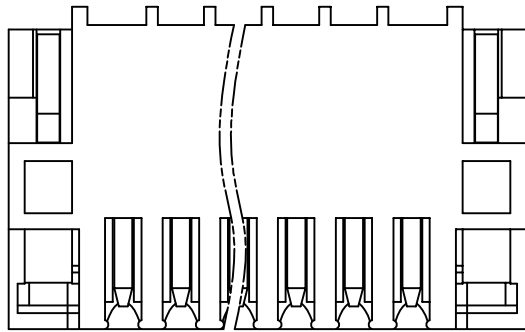


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.11.15

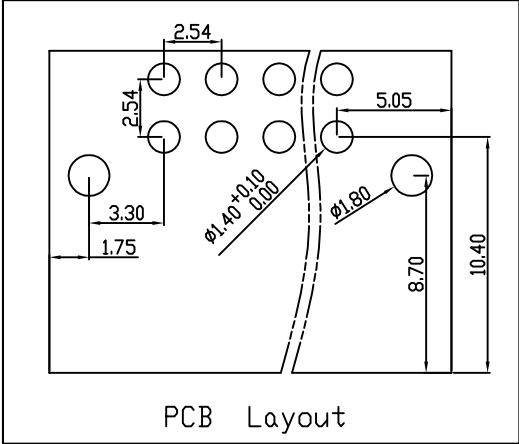

UL/CUL 技术参数 UL/CUL Technical Data							
等级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	150	-	-			
额定电流	Rated Current [A]	5	-	-			
接线范围	Wire Range	-					
单/多芯线	Solid/Stranded [AWG]	-					
耐电压	Withstanding Voltage	1300V/1Min					
IEC 技术参数 IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage [V]	-	160	320			
额定电流	Rated Current [A]	-	6	6			
额定冲击电压	Impulse withstand voltage <sup>a</sup> [KV]	-	2.5	2.5			
导线截面积	Conductor cross section	-					
硬质/柔性导线	Solid/flexible [mm <sup>2</sup> ]	-					
材料 Material							
绝缘材料	Insulation Material	PA66					
阻燃等级	Flammability	UL94V-0					
导体材料	Contact Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Tin Plated					
一般参数 Other Data							
间距	Pitch [mm]	2.54					
极数	Poles [P]	2x(02-24)					
剥线长度	Stripping Length [mm]	-					
螺丝	Screw/扭矩 Torque(Max) [N.m]	-					
工作温度	Operating temperatur [°C]	-40~+120					
引针尺寸	Pin Dimensions [mm]	2.60					
PCB板孔径	PCB Hole Diameter [mm]	Ø1.40 / Ø1.80					

DES.	SJD	DATE	22.06.16
CHK.	BY	DATE	22.06.16
APP.	CLF	DATE	22.06.16

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
						名称/TITLE	KF2EDGERMA-2.54	



慈溪市科发电子有限公司  
CIXI KEFA ELECTRONIC CO., LTD