

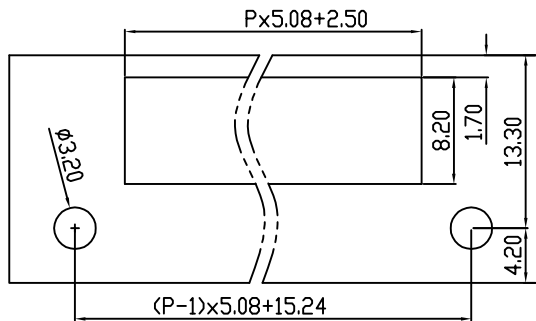
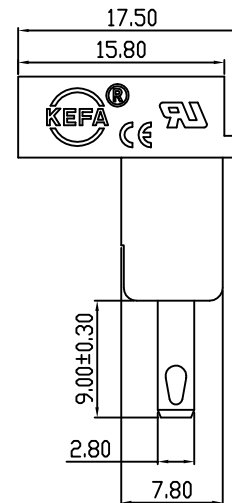
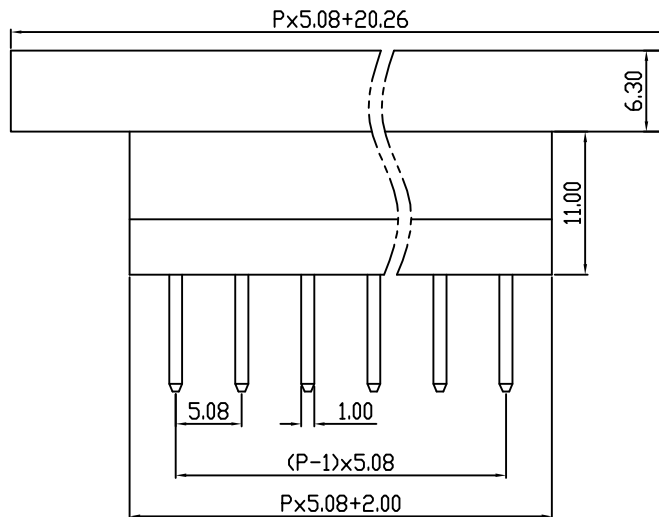


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



PCB LAYOUT

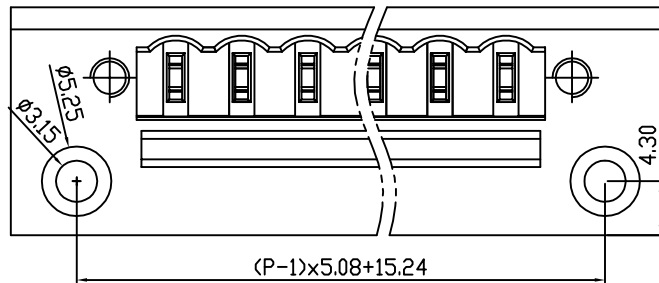

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03.15

UL/CUL 技术参数						
UL/CUL Technical Data						
等级	Use Group	B	C	D		
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	10	-	10	
接线范围	Wire Range	-				
单/多芯线	Solid/Stranded				[AWG]	
耐电压	Withstanding Voltage	AC1600V/1Min				
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category	III	III	II		
污染等级	Contamination Class	3	2	2		
额定电压	Rated Voltage	[V]	-	320	630	
额定电流	Rated Current	[A]	-	15	15	
额定冲击电压	Impulse withstand voltagea	[KV]	-	4.0	4.0	
导线截面积			Conductor cross section			
硬质/柔性导线	Solid/ flexible	[mm²]	-			
材 料						
绝缘材料	Insulation Material	热塑性材料 Thermoplastic				
导体材料	Contactor Material	铜合金 Copper alloy				
导体表面镀层	Contactive Coating	镀锡 Tin Plated				
一般参数 Other Data						
间距	Pitch	[mm]	5.08			
极数	Poles	[P]	2-24			
剥线长度	Stripping Length	[mm]	-			
螺丝	Screw/扭矩	Torque(Max)	[N.m]	-		
工作温度	Operating temperatur	[°C]	-40~+105			
引针尺寸	Pin Dimensions	[mm]	9.0			
PCB板孔径	PCB Hole Diameter	[mm]	-			
安装类型	Mounting type	面板安装			Panel mounting	

DES.	FZM	DATE	21.03.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
CHK.	SY	DATE	21.03.15	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD									
APP.	CLF	DATE	21.03.15								名称 / TITLE	KF2EDGWB-5.08	