

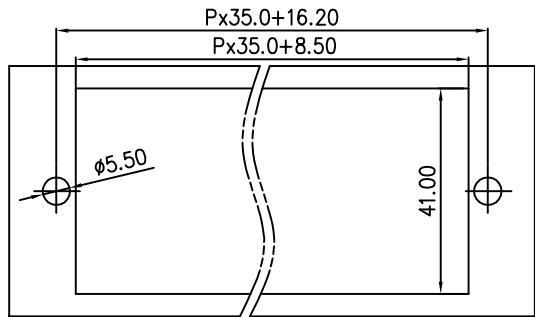
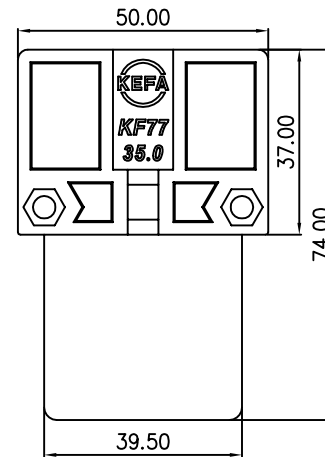
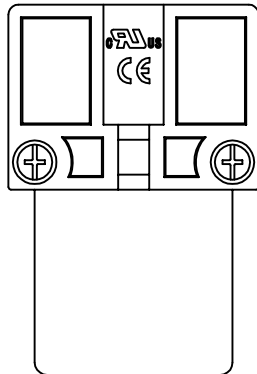


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

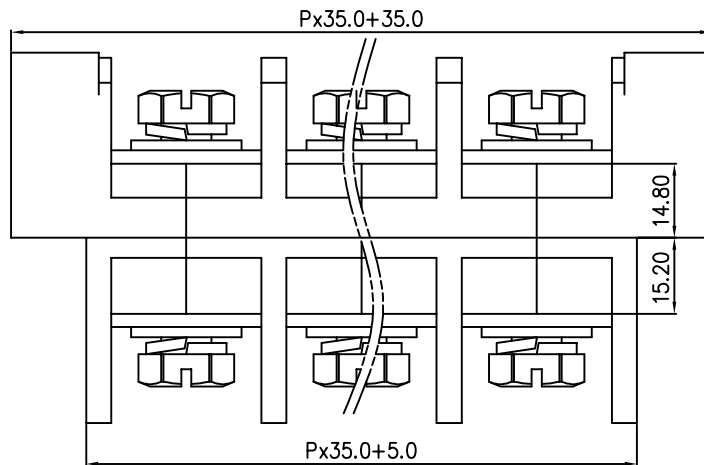

PCB LAYOUT

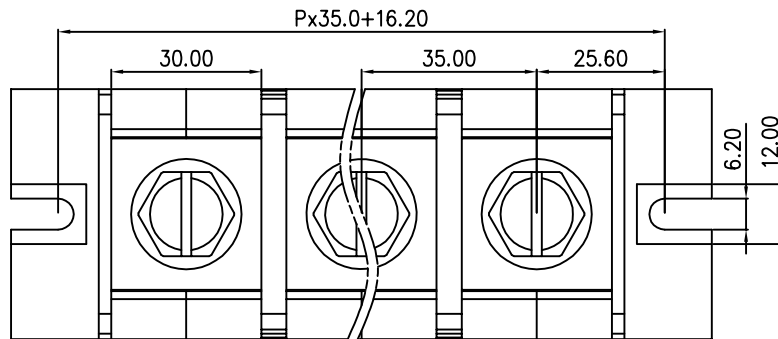

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	24.05.17
B	版本更新		CLF	26.07.28

UL/CUL 技术参数

UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	-
额定电流	Rated Current [A]	300	-	-
接线范围	Wire Range	3/0-500		
单/多芯线	Solid/Stranded [AWG]			

IEC 技术参数

IEC Technical Data

额定电压	Rated Voltage [V]	1000
额定电流	Rated Current [A]	300
耐电压	Withstanding Voltage	AC3500V/1Min
导线截面积	Conductor cross section	150.0
硬质/柔性导线	Solid/flexible [mm ²]	

材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀镍 Ni plating

一般参数 Other Data

间距	Pitch [mm]	35.0
极数	Poles [P]	1-15
剥线长度	Stripping Length [mm]	-
螺丝	Screw/扭矩 Torque(Max) [N.m]	M10/10.2
工作温度	Operating temperature [°C]	-30~+120
引脚尺寸	Pin Dimensions [mm]	-
PCB板孔径	PCB Hole Diameter [mm]	-

DES.	LSW	DATE	26.07.28
CHK.	SJD	DATE	26.07.28
APP.	CLF	DATE	26.07.28

单位 / UNITS mm

尺寸 / SIZE A4 比例 / SCALE 1:1



慈溪市科发电子有限公司
CIXI KEFA ELECTRONICS CO., LTD

第三视角 / THIRD ANGLE PROJECTION	版本 / REV	B
-------------------------------	----------	---

名称 / TITLE	KF77-35.0
------------	-----------