RUNLUX | LED Wraparound Fixture

LED Linear Strip Fixture



Overview

Runlux's Wraparound Light Ideal choice for residential, commercial and industrial lighting. Steady performance and long lifetime

Features

- Voltage：120-277V/60Hz, **120-347V**/60Hz as optional;
- High Lumen Efficiency：Lumen output more than 130 lm/w, reduces energy consumption up to 80% compared to a fluorescent fixture.
- CCT： 3500, 4000 and 5000K

3CCT: One fixture 3 color temp(3500K,4000K,5000K)

- 4 wattage selectable in wrap light
- Ambient Temperature:-25℃~45℃
- Certified by DLC premium& ETL(cETL)
- Guarantee: 5 year warranty


Model Selection (Remark: Single Color(3500K/4000K/5000K is optional)

Model No.	Product Size	Rated Power	Lumen	CCT	Efficiency	Dimming	Cert
RG-2WR23WD3CCT	24″*5.2″*2.83″	23W	2290	**3500K 4000K 5000K in one fixture**	130	0-10V Dimmable	ETL+DLC Premium
RG-4WR26WD3CCT	48″*5.2″*2.83″	26W	3380				
RG-4WR35WD3CCT	48″*5.2″*2.83″″	35W	4550				
RG-4WR39WD3CCT	48″*5.2″*2.83″″	39W	5070				
RG-4WR46W4P3C (46W/39W/35W/30W)	48″*5.2″*2.83″	46W/39W/35W/30W	5980/5070/4550/3900	**3CCT, 4Watt in one fixture**			

***Now 120-347V is besting selling in Canada market!

Drawing

L (mm)	W (mm)	H (mm)
610	132	71.9
1220	132	71.9

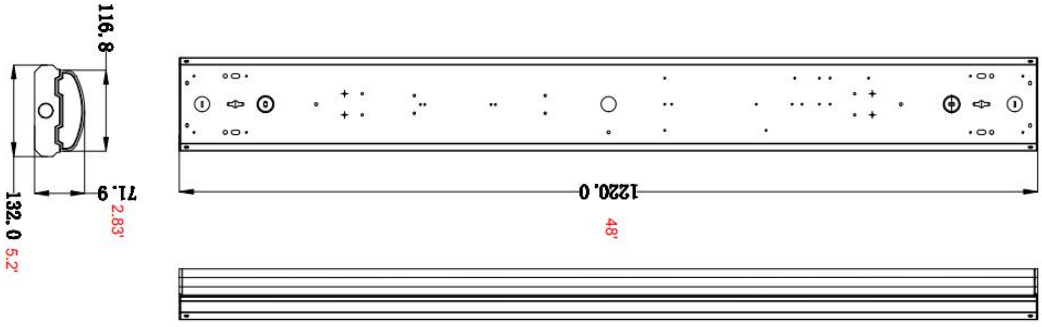

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email:sales@runlux.net |

RUNLUX | LED Wraparound Fixture

Specifications

Item	specification	Model			
		RG-2WR23WD3CCT	RG-4WR26WD3CCT	RG-4WR39WD3CCT	RG-4WR46W4P3C
General Performance	Power Consumption	23W	26W	39W	46W/39W/35W/30W
	Lumens Delivered	2290lm	3380lm	4550lm	5980/5070/4550/3900
	Efficacy(lm/w)	130			
	CRI	80			
	Color Temperature	3500K/ 4000K /5000K			
	Lifetime(hours)	50,000			
	Color Consistency	Proprietary binning for uniform color			
	Power Factor	0.99			
	Input voltage	**120-277V standard (120-347V for option)**			
Physical	Housing	Plastic			
	Mounting	Ceiling Mount or Cable Mount			
	Humidity	20%-85% RH, non-condensing			
Certification	Certification	ETL, cETL, DLC premium, LM-79, LM-80(LED)			
	Material usage	RoHS compliant; no mercury			
	Work Temperature	-4°F to 122°F (-20°C to +50°C) operating temperature			
	Environment	Damp-listed			
	Warranty	5 years limited			

Motion Sensor



Built-in motion sensor
120-277V Only,
5m Height Max



External motion sensor
120-347V Only,
5m Height Max



External motion sensor
12V Only (suit for 120-347V driver)
4m Height Max

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email:sales@runlux.net |